

SAFETY AT EVERY RUNG

What you need to know
to stay compliant with
ladder safety.

YOUR LADDER SAFETY CHECKLIST

- 1. Count the rungs and check the total height**
 - To quickly gauge a ladder's height, count the number of rungs. If there are 24 rungs or more, this means it's at least 24 feet and the standard applies.
 - Consider the height of the ladder as well as the height of the system you're attaching for safety; OSHA 1910.23 Standard regulation states any ladder over 24 feet or higher in a continuous run is applicable.
- 2. Is your ladder fixed or non-fixed?**
 - Fixed ladders require fall protection over a certain height.
 - For non-fixed ladders, no fall protection is required but there must be three points of contact at all times (two feet and one hand, for example).
- 3. Is there a metal cage surrounding your ladder?**
 - It's not required to remove the cage, however, depending on type of fall protection system used, it may be necessary to remove the existing cage to ensure cage does not interfere with safe operation of fall protection system, OSHA Regulation 1910.28(b)(9)(iv).
- 4. Are you repairing or replacing a rung? Doing maintenance on the current ladder?**
 - Requires if any modification to an existing ladder system is completed (i.e. repairing/replacing a damaged rung), the entire ladder system must be updated to adhere to the OSHA 1910.23 regulation.
- 5. New ladder systems being installed must meet the regulation**
- 6. You need guardrails or fall protection at the top of each ladder system**
 - When exiting the top of the ladder places you within 6ft of an unprotected leading edge, Guardrail or Fall Protection is needed.

EACH YEAR

300+

fatalities due to ladder-related
accidents.¹

¹<https://www.safetypartnersinc.com/march-2023-is-national-ladder-safety-month/#~:text=In%20addition%20to%20the%20high,ladder%2Drelated%20injuries%20each%20year!>

Honeywell
MILLER



THE REGULATION

The OSHA fixed ladder regulation (1910.23) was designed, at least partly, to align more with the General Industry and Construction Standards. The regulation requires a personal fall arrest or ladder safety system on fixed ladders over 24 feet. It also eliminates and phases out the use of cages/wells and guardrails as primary fall protection methods, allowing employers to choose the fall protection system they want to use on existing and new ladders.

Relevant OSHA codes as they relate to 1910.23.

- For caged, fixed ladders erected before November 19, 2018, employers have up to 20 years to install ladder safety or personal fall arrest systems (1910.28(b)(9)(i)(A))
- For new fixed ladders erected on or after November 19, 2018, the employer must equip the ladder with a ladder safety or personal fall arrest system (1910.28(b)(9)(i)(B))
- For ladder repairs and replacements, when an employer replaces any portion of a fixed ladder, the replacement must be equipped with a ladder safety or personal fall arrest system (1910.28(b)(9)(i)(C))
- After November 18, 2036 all fixed ladders must be equipped with a ladder safety or personal fall arrest system (1910.28(b)(9)(i)(D))

Honeywell's trusted safety experts can help do an assessment on your site.

Let us help you today.

- **Identify** all the existing fixed ladders in an industrial environment
- Help **determine** if ladders are in compliance with OSHA 1910.23
- Perform a **site survey** fall hazard assessment to identify safety hazards associated with fall exposures
- **Design systems** to meet OSHA 1910.23 for fixed ladders with complete engineering, drafting, and design services from Honeywell Miller that work in concert with your team
- **Supply** all system components, PPE, and customer fabrications that are designed specifically for system attachment to existing or new structures
- **Train** employees on the new ladder climbing system

FIXED LADDERS:

- Are permanently attached to a structure, building, or equipment
- Includes individual-rung ladders, but not ship stairs, step bolts, or manhole steps
- Cannot be readily moved or carried because it is an integral part of a building or structure

IMPORTANT DATES:

November 19, 2018

- Each fixed ladder that is over 24 feet high and is installed on or after November 19, 2018, must be equipped with a personal fall arrest system or a ladder safety

November 18, 2036

- Existing fixed ladders installed prior to this date that use cages or wells will be required to incorporate ladder safety systems or personal fall arrest systems by November 18, 2036
- Many fixed ladder systems are already in compliance, unless they incorporate the use of cages which must be phased out.
- OSHA research has shown that cages do little to protect the worker when he/she falls.
- Cages can cause workers to be tangled up after a fall and can make rescues quite problematic as workers can hit their head in a fall and/or lose consciousness.

SOLUTIONS

Honeywell Miller ladder climbing systems combine cable and rail pre-configured kits along with customizable solutions, accessories, and options designed to fit virtually any environment. This enables companies to provide consistent, safe climbing throughout their entire facility to protect workers at-height. A few of our OSHA-compliant solutions include:



Top Bracket + Self-Retracting Lifelines (SRL) Combo

This fixed ladder safety system with top bracket and self-retracting lifeline is a cost-effective solution to ladder safety. It keeps workers safe while using harnesses that don't have a front D-ring, eliminating guard rails and shuttles to meet regulations.



VR600 Ladder Climbing System Kits (Rail)

The easy-to-climb GlideLoc system offers hands-free fall protection that increases worker mobility, safety, and productivity. The smooth, quiet trailing action along the rail provides an easier, more comfortable climb and the automatic design keeps both hands free for climbing, increasing mobility and efficiency. Also, the integrated shock-absorbing mechanism reduces force on the worker and system in the event of a fall.



Vi-Go™ Ladder Climbing Safety Systems (Cable)


The Vi-Go ladder climbing systems provide the ultimate in safety with continuous fall protection when climbing fixed ladders, available with automatic or manual personal fall arrestor cable sleeves. Both cable sleeves are designed to follow the user along the lifeline while ascending or descending, instantly locking in the event of a fall. Vi-Go accommodates up to four workers at a time, increasing overall productivity. Vi-Go's automatic pass through brackets allow the climber to keep both hands on the ladder at all times, increasing their personal safety.



Saf-T-Climb™ Ladder System

The Saf-T-Climb System provides total ladder climbing safety for workers on any site – above or below ground, straight or curved. The round rail of the Saf-T-Climb makes dismounting easy and safe, with a removable extension for up or down climbs through a hatch, and permanent dismounts. The Saf-T-Climb is easily retrofitted to existing ladders or designed into new construction. Installation of a Saf-T-Climb fall prevention system means instant compliance with OSHA climbing safety regulations. Any slip or fall is stopped by the locking action of the Saf-T-Grip™ Shuttle.

One key to keeping workers safe is to avoid injuries in the first place. That begins with establishing guidelines and understanding regulations that help workers stay safe. At Honeywell, we are devoted to providing top-quality equipment and knowledgeable consultants that help our customers recognize their risks, comprehend the regulations, and implement a safe fall solution.

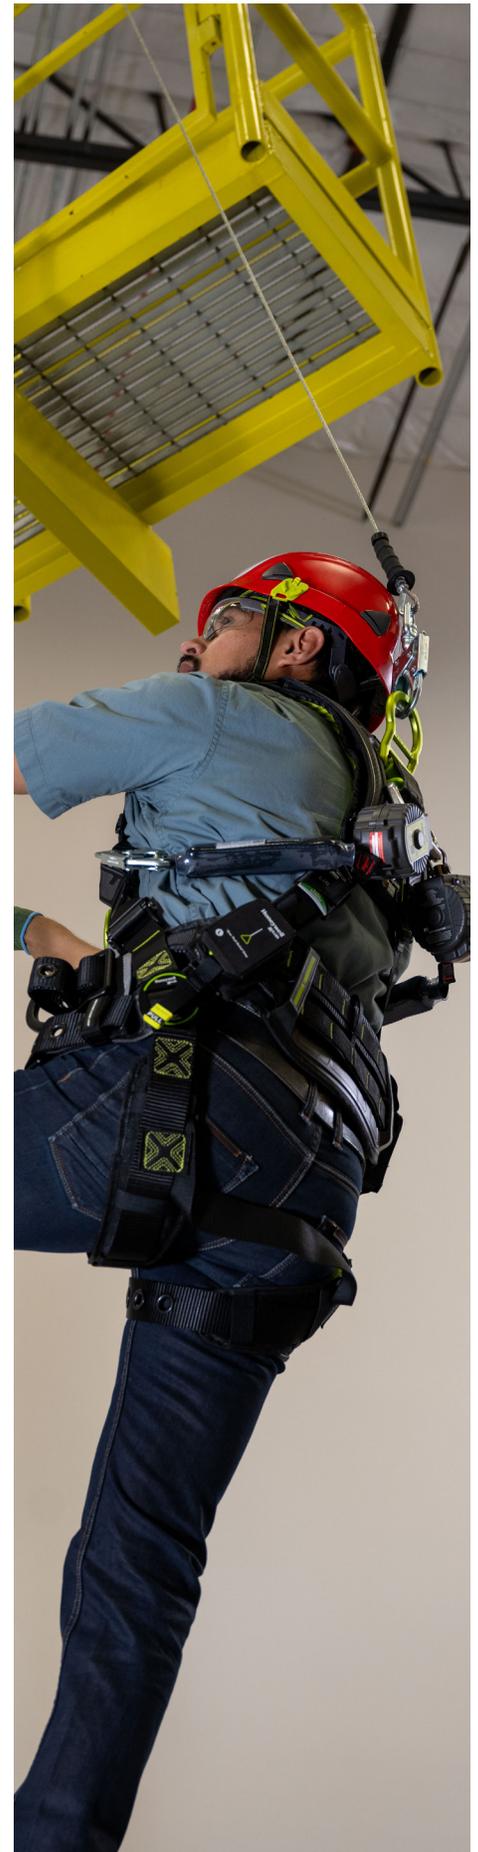

WEAR A SAFETY HARNESS



Honeywell Miller H700 Full Body Harness

Features ergonomically-superior chest design, configurable leg strap for customizable comfort, rotative belt for enhanced freedom of movement, practical integrated SRL connector, high-tech 3D padding and one-pull trauma relief step for suspension trauma relief.



Honeywell Miller H500

Offers greater freedom of movement with specially formulated webbing that flexes to accommodate movement and body contours for optimum comfort around legs/shoulders. Also features Smart Anti-Tangle for hassle-free donning experience, plus user friendly lanyard keepers.



For more Information

automation.honeywell.com

For Information on Innovations and Patents

hsmpats.com

Honeywell Safety Products

855 S Mint St
Charlotte, NC 28202
www.honeywell.com

HPPE_Fall_NA_US&C_Ladder_Safety | 8/24
©2024 Honeywell International Inc.

Honeywell
MILLER